

Product Technical Data Sheet: Partex Polyethylene Terminal Blocks

Description

Our high quality terminal blocks are made from Polyethylene, with Brass inserts and captive galvanised steel screws.


Specifications

Materials:

Block: Polyethylene (PE)
Inserts: Brass
Screws: Galvanised Steel

Maximum Temperature: +80°C
Standard: CE (BS EN 60998)

Supplied as a twelve pole strip, which can easily be cut to size.

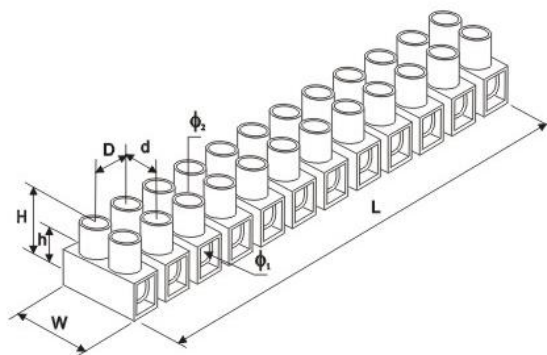

Part Number	Max Cable Size		Rated Voltage	Dimensions (mm)							
	Solid	Stranded		L	W	ø1	ø2	D	d	H	h
TB Poly 3	4 mm ²	2.5 mm ²	380 V	93	17	2.8	2.1	8	6	14	7
TB Poly 5	6 mm ²	4 mm ²	380 V	114	19	3.3	2.6	10	8	16	9
TB Poly 15	10 mm ²	6 mm ²	400 V	138	23	4.5	3.0	12	10	19	11
TB Poly 30	16 mm ²	10 mm ²	400 V	165	26	5.5	3.0	14	11	20	12
TB Poly 60	25 mm ²	16 mm ²	400V	186	30	7.1	3.3	16	13	26	15

ø1 : Wire entry hole diameter

ø2 : Fixing hole diameter

Partex Marking Systems (UK) LTD

61-64 Station Road, Coleshill, Birmingham B46 1JT

Tel: 01675 463670 Fax: 01675 463520 Email: sales@partex.co.uk