


Product Technical Data Sheet:

Supaflex Braided Cable Sleeving

Description

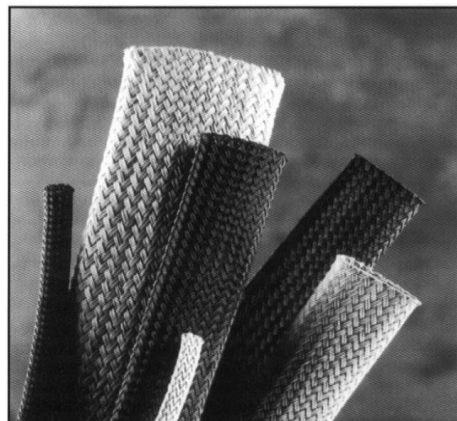

Supaflex Braided Cable Sleeving is suitable for the enclosure and protection of cables and hoses. It can be used for many types of electrical and mechanical installations, including power, telecommunications, automotive, marine, aircraft and domestic appliances.

The woven design enables any number of cables to branch out along the assembly.

It is easy to use and available in a wide range of sizes.

For best results cut with a hot knife or soldering iron to seal the ends and prevent fraying.

Specification

Material:	Polyester
Standard Colours:	Black and Grey
Flammability:	Self-extinguishing to UL 94-V0, UL 94-V2
Work Temperature:	-50°C to +150°C
Melting Point:	230°C (± 5°C)
Standards:	UL File No: E317364 Halogen Free

Partex Part Number	Nominal Diameter (mm)	Size Range (mm)		Standard Pack Qty (M)
		Minimum	Maximum	
SUP4	4	2.4	6.4	10,100
SUP6	6	3.2	11.1	10,100
SUP8	8	6.4	12.7	10,100
SUP10	10	4.8	15.9	10,100
SUP12	12	1.4	19.1	10,100
SUP15	15	9.5	25.4	10,100
SUP20	20	12.7	31.8	10,100
SUP25	25	15.9	38.1	10,100
SUP30	30	19.1	44.5	10,100
SUP40	40	25.4	63.5	10,100*
SUP50	50	38.1	88.9	10,100*

* Supplied as 2 x 50mtr rolls.

Partex Marking Systems (UK) LTD

61-64 Station Road, Coleshill, Birmingham B46 1JT

Tel: 01675 463670 Fax: 01675 463520 Email: sales@partex.co.uk