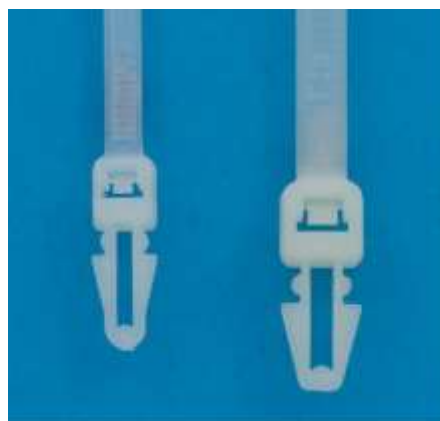


Product Technical Data Sheet:**Push Mount Cable Ties****Description**

Partex push mount cable ties provide a quick and effective method for securing cables to a panel or chassis, without the need for any additional fixings.  
These cable ties have a triangular shaped head which can be pushed into a pre-drilled hole.

**Specification**

Material:	DuPont Zytel 101F Nylon 6.6 Polyamide
Flammability:	Self-extinguishing to UL 94-V2
Work Temperature:	-40°C to +85°C
Recommended storage conditions:	+15°C to +30°C 50% Humidity.

High tension, highly resistant against; Brake Fluids, Lubricants, Power Steering Fluids, Oil, Grease, Paints, Lacquer Detergents, Animal and Vegetable Fats, Alkali up to 40% and Gasoline.

Available in Natural colour only.

Partex Part No	Length (mm)	Width (mm)	Maximum Bundle (mm)	Tensile Strength (kg)	Maximum Panel Thickness (mm)	Nominal Hole Diameter (mm)
PM150	151	3.6	32	18	2.4	4.8
PM200	200	4.8	50	22	3.2	6.5

**Partex Marking Systems (UK) LTD**

**61-64 Station Road, Coleshill, Birmingham B46 1JT**

**Tel: 01675 463670 Fax: 01675 463520 Email: [sales@partex.co.uk](mailto:sales@partex.co.uk)**